


Sliding Anchors

Sliding Anchor Stems


TecTies sliding anchors have 25 x 5mm stems and are designed to fit within the cavity using one way or two way safety ties, that slide to accommodate vertical movement when restraining cavity walls to overhead structures.

They are available with seven different head options complete with 12mm diameter fixing holes to suit M10 single Expansion or M10 T Head Bolts.


TTSAB

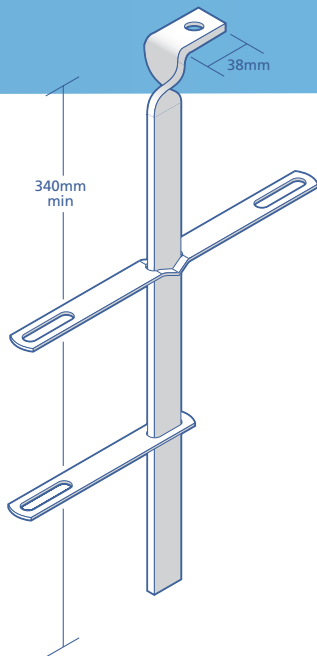


TTSAC

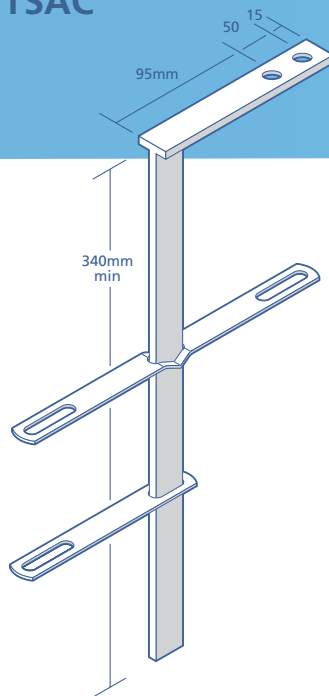


TTSAD

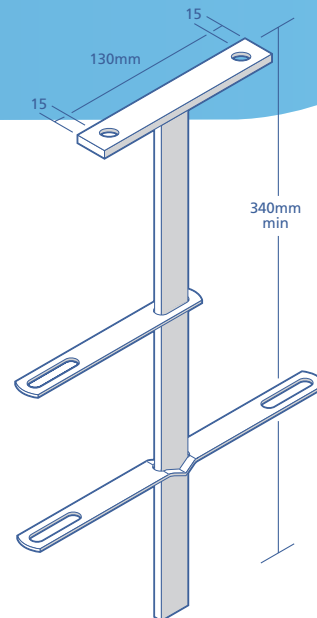

TTST single ties



TTSU double ties



TTST/TTSU Test Results BS EN 845-1 : 2013

	Mean Load Capacity	Displacement at 1/3 load
Tension	2510N	0.18mm
Compression	4240N	0.46mm



In line with NHBC technical requirements.



visit www.tecties.co.uk for more information or call **01663 749361**


Unit 4 Hurstfield Ind. Estate, Hague Bar, New Mills, High Peak, SK22 3AT | **tel:** 01663 749361 **fax:** 01663 747897 **email:** sales@tecties.co.uk

Sliding Anchors


Sliding Anchor Stems

TecTies sliding anchors have 25 x 5mm stems and are designed to fit within the cavity using one way or two way safety ties, that slide to accommodate vertical movement when restraining cavity walls to overhead structures. They are available with seven different head options complete with 12mm diameter fixing holes to suit M10 single Expansion or M10 T Head Bolts.


TTSAE

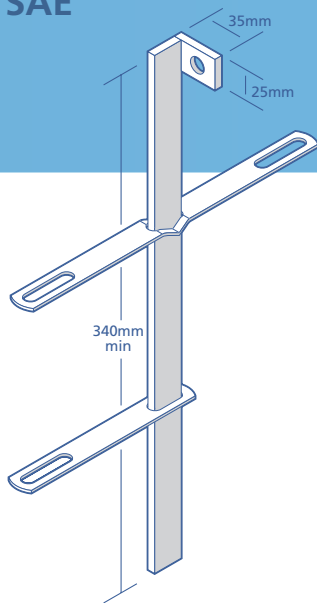


TTSAF

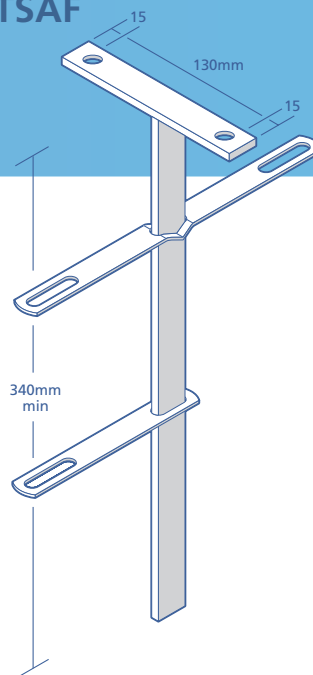

TTSAG

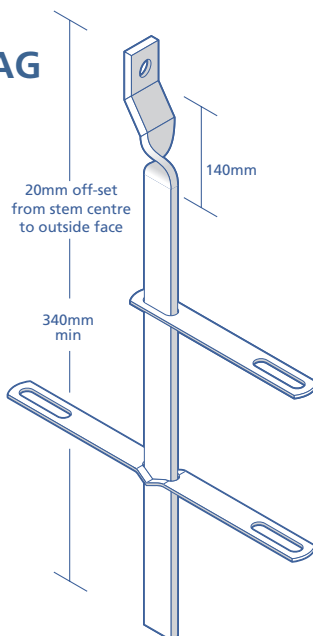

TTSAH

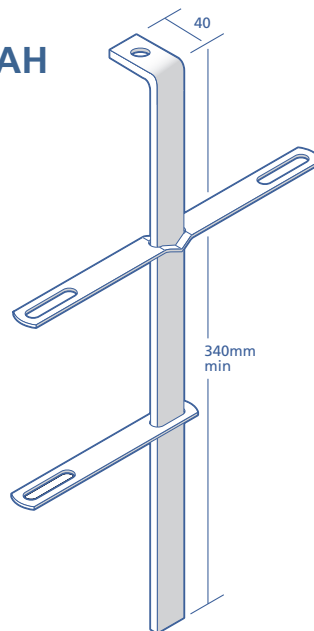

In line with NHBC technical requirements.

visit www.tecties.co.uk for more information or call **01663 749361**

Unit 4 Hurstfield Ind. Estate, Hague Bar, New Mills, High Peak, SK22 3AT | **tel:** 01663 749361 **fax:** 01663 747897 **email:** sales@tecties.co.uk